

Adding UMKa3XX ST to the Wialon hosting platform

GLONASSsoft technical support:

portal request: <http://help.glonasssoft.ru>,

e-mail: support@glonasssoft.ru

Phone number: **8-800-700-82-21**

Enter these parameters to register on Wialon:

1. Identifier – IMEI 1111222233334444 (ОБРАЗЕЦ)
2. ServerIP address: 193.193.165.165
3. Port: 21336 (UMKa300), 21510 (UMKa301), 21787(UMKa310)

AddingUMKa3XXSTtotheWialonhostingplatform

We recommend that you use Google Chrome browser for the best <https://online.glonasssoft.ru/> experience. This manual explains how to add UMKa301 trackers. Trackers of the UMKa3XX line are added in the same way.

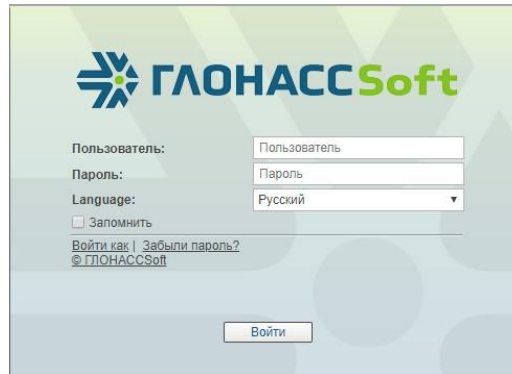


Figure 1: Accessing the portal.

Log into your account (Fig. 1).

In the window opened, select "Objects" in the upper toolbar and click "Create" (Fig. 2).

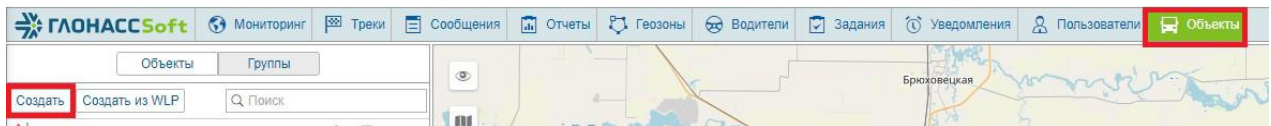


Figure 2: Authorization on the portal.

Be sure to specify: "Name", "Device Type" and "Unique ID" (IMEI) (Fig. 3).

Figure 3: Adding new object.

Add a sensor by filling out the form. Be sure to specify: "Name", "Sensor Type", "Parameter" (Sensors / Create) (Fig. 4).

Имя: *	Зажигание
Тип датчика:	Датчик зажигания
Система мер:	Метрическая
Единица измерения:	Вкл/Выкл
Параметр: * ?	in1
Последнее сообщение: ?	<input type="checkbox"/>
Таймаут, секунд:	0
Описание:	
Валидатор:	Нет
Тип валидации:	Логическое И
Расход, литров в час: ?	0

Интервалы и цвета:

От	Цвет	Текст
+ Добавить интервал		

Отмена OK

Figure 4: Adding sensors.

After entering all the required data, click "OK". A tracker with connected sensors will be added on the Wialon hosting platform.

An added tracker should appear in the object list. You can see its status and availability in the "Monitoring" tab.

Should you have any questions, please do not hesitate to contact GLONASSsoft technical support portal at: <http://help.glonasssoft.ru>